


THE
INSERT
BY


**Wood
Chuck**



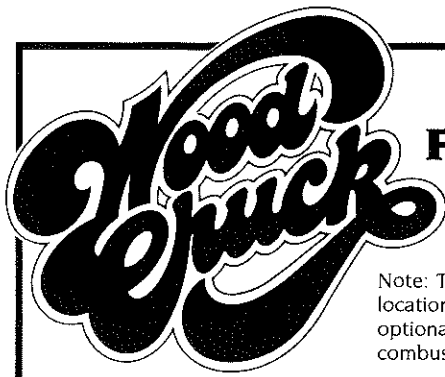

INSERT FEATURES

Note: This is the location of the optional catalytic combustor.

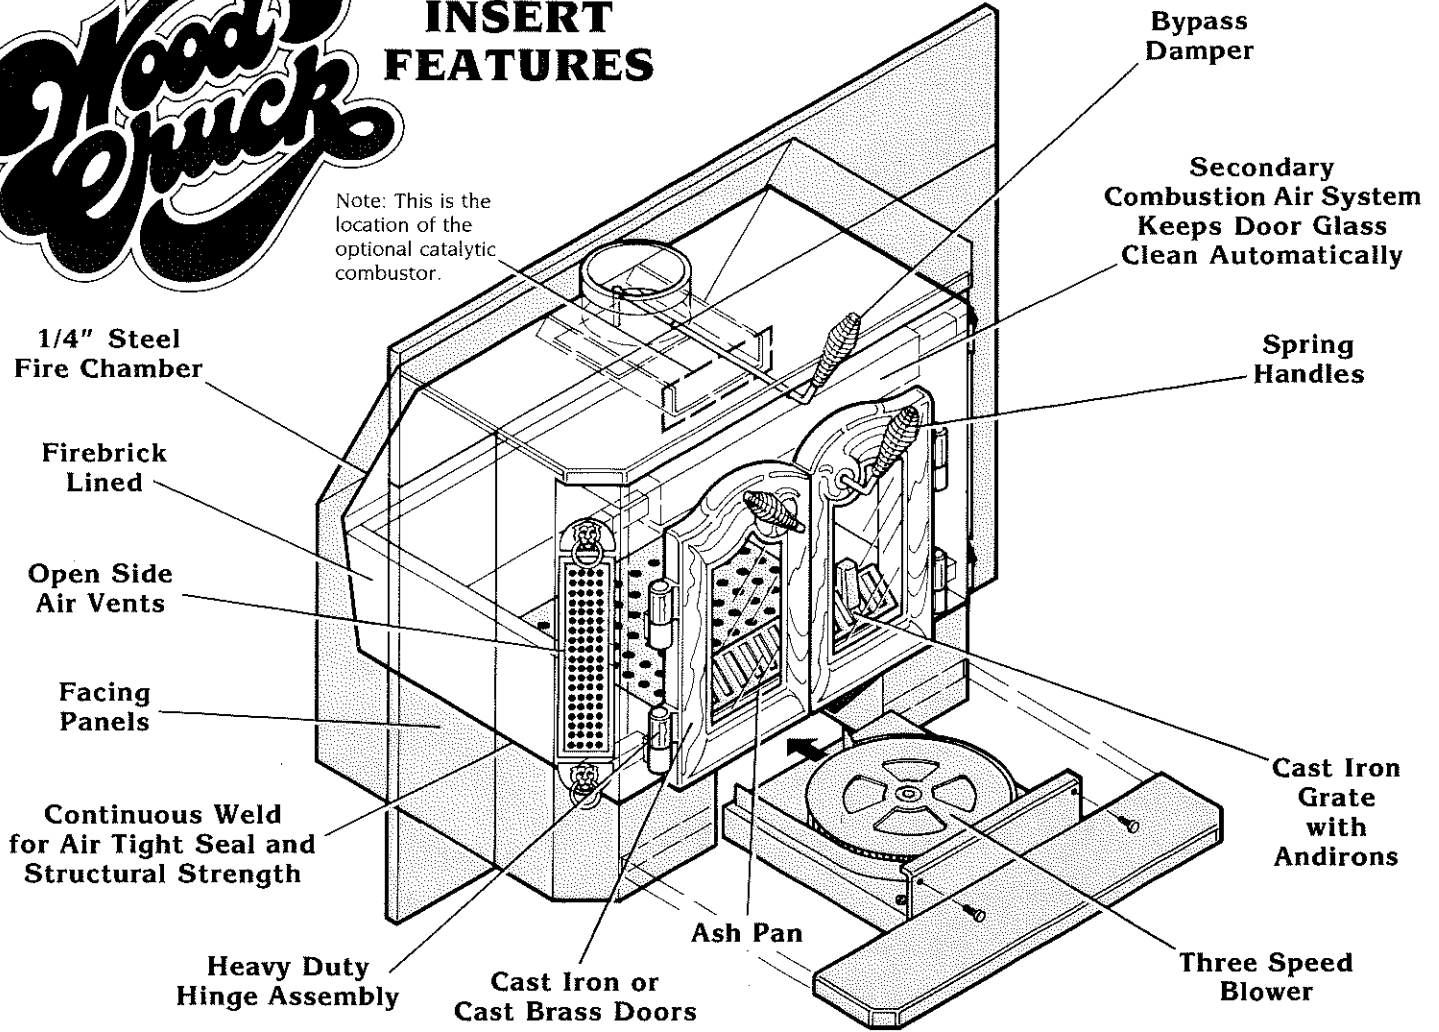

Woodchuck has combined time-honored and proven concepts with updated technology to develop a truly unique and elegant fireplace insert. Its stately appearance will attract the attention of even the most demanding individual. The performance and operation will impress you even more.

The fire chamber is constructed of 1/4" plate steel, continuously welded for strength and durability. The unit has heavy duty firebrick, one piece grate with andirons and is capable of burning wood or coal. The sophisticated combustion air system is extremely efficient and at the same time keeps the glass doors clean. The optional catalytic combustion provides even greater efficiency and cleaner air. The advanced three-speed blower system automatically turns on and off, and adjusts its speed according to the air temperature.


Option: The Woodchuck Insert can be used as a Free Standing Unit. If desired free standing legs are provided.

INSERT SPECIFICATIONS

MODEL	D-30	D-50
Height	22"	25"
Width	28"	31"
Depth	22"	24"
Fire Chamber	2.75 cu. ft.	3.8 cu. ft.
Max. BTU Input	60,000	80,000
3-Speed Blower Capacity	400, 500, 600 C.F.M.	400, 500, 600 C.F.M.
Log Size	18"	21"
Weight	420 lbs.	520 lbs.


Another Fine Product from Danart



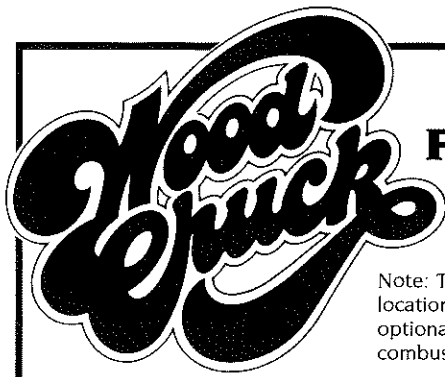

INSERT FEATURES

Note: This is the location of the optional catalytic combustor.

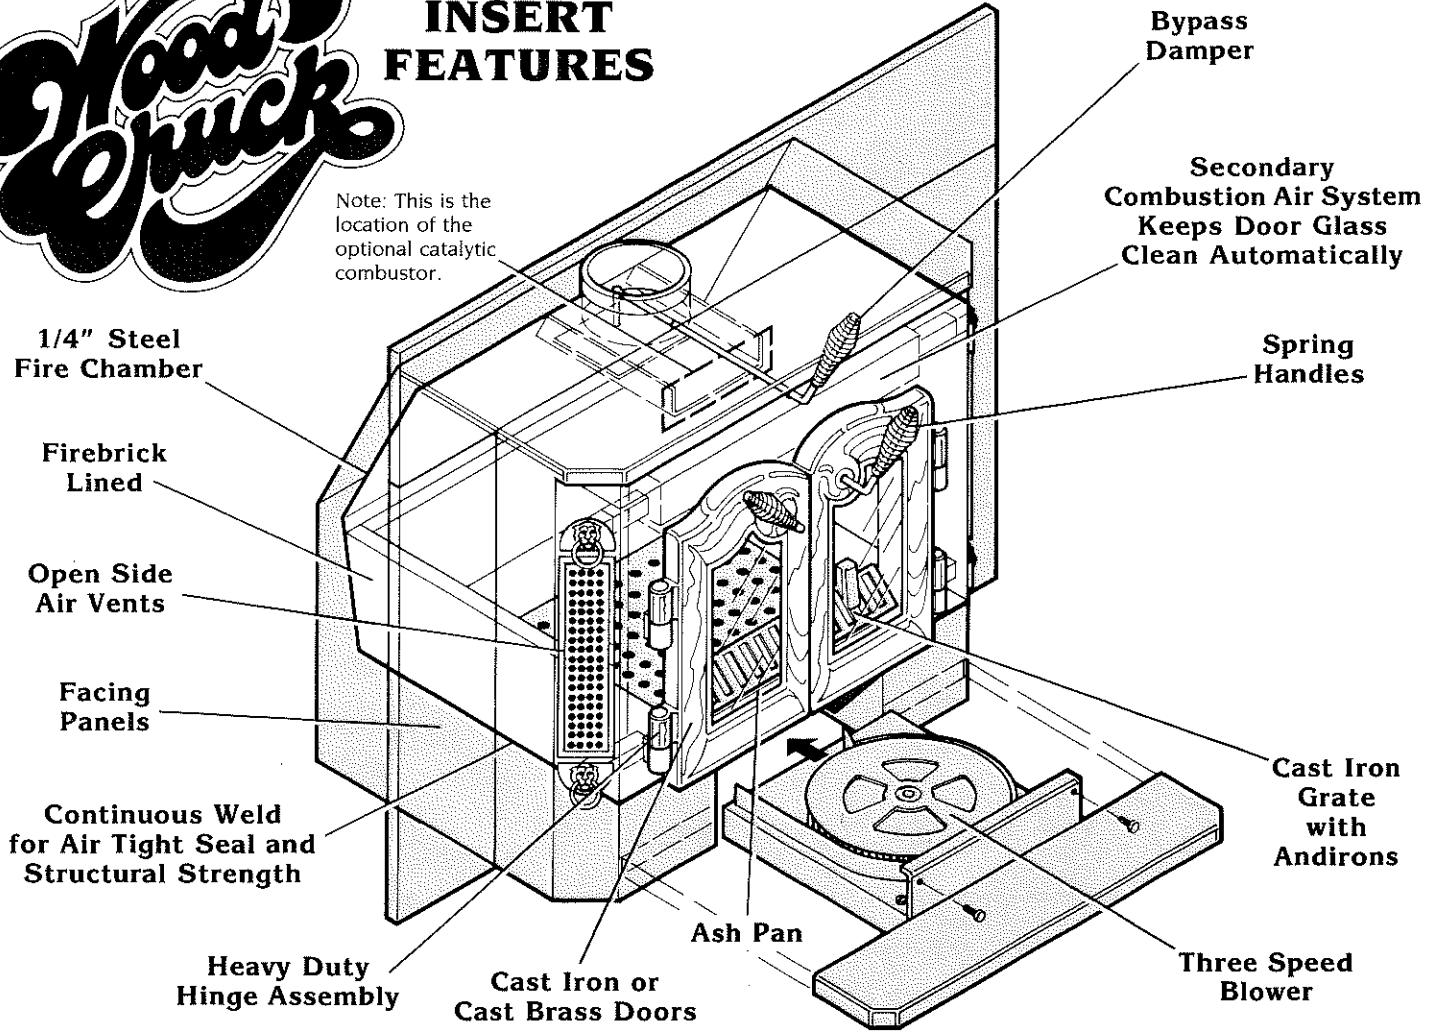

Woodchuck has combined time-honored and proven concepts with updated technology to develop a truly unique and elegant fireplace insert. Its stately appearance will attract the attention of even the most demanding individual. The performance and operation will impress you even more.

The fire chamber is constructed of 1/4" plate steel, continuously welded for strength and durability. The unit has heavy duty firebrick, one piece grate with andirons and is capable of burning wood or coal. The sophisticated combustion air system is extremely efficient and at the same time keeps the glass doors clean. The optional catalytic combustion provides even greater efficiency and cleaner air. The advanced three-speed blower system automatically turns on and off, and adjusts its speed according to the air temperature.

Option: The Woodchuck Insert can be used as a Free Standing Unit. If desired free standing legs are provided.

INSERT SPECIFICATIONS

MODEL	D-30	D-50
Height	22"	25"
Width	28"	31"
Depth	22"	24"
Fire Chamber	2.75 cu. ft.	3.8 cu. ft.
Max. BTU Input	60,000	80,000
3-Speed Blower Capacity	400, 500, 600 C.F.M.	400, 500, 600 C.F.M.
Log Size	18"	21"
Weight	420 lbs.	520 lbs.

Another Fine Product from Danart

